


Spachgateway für CASAMBI-Lichtsteuerung

Voice gateway for CASAMBI lighting control

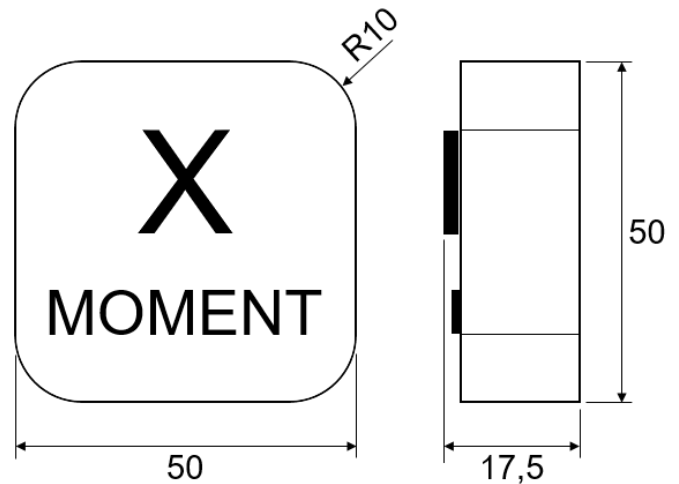

		4 Befehle 4 commands	16 Befehle 16 commands	20 Befehle 20 commands
Artikelnummer	Part no.	808861	808866	808771
Typ	Type	ILXM-4WBTB	ILXM-16WBTB	ILXM-20WBTB
Versorgungseingang	Power supply input	5 Vdc; 0,5 A / Mikro USB-B		
Funksignal	Radio signal	2,4..2,483 GHz; 4 dBm		
Reichweite	Range	bis zu 40 m up to 40 m		
Schutzart	Degree of protection	IP20		
Abmessungen	Dimensions	50 x 50 x 17,5 mm		

- Sprachgateway (ALEXA-Ready) mit 4, 16 oder 20 Sprachbefehlen für CASAMBI-Netzwerke
 - Ermöglicht die Steuerung Ihrer Geräte in CASAMBI-Netzwerke über selbstdefinierte Sprachbefehle
 - Auf Smart-Geräten konfigurierbar und vielseitig nutzbar, Einrichtungssoftware kostenlos im App-Store verfügbar
 - Benötigt zusätzlich ein ALEXA-fähiges Gerät
 - Kann auch die Gateway- und Uhrzeitfunktion für CASAMBI-Netzwerke übernehmen
 - Im Lieferumfang enthalten: ein 50 cm USB-A- auf Mikro USB-B-Kabel
- Voice gateway (ALEXA ready) with 4, 16 or 20 voice commands for CASAMBI networks
 - Allows you to control your devices in CASAMBI networks using self-defined voice commands
 - Configurable on smart devices and usable in many ways, setup software available free of charge in the app Store
 - Also requires an ALEXA-enabled device
 - Can also take over the gateway and clock function for CASAMBI networks
 - A 50 cm USB-A to micro USB-B cable is included in delivery