


Casambi Dali Interface (ASD)

Casambi Dali interface (ASD)

Wieland Plug & Play

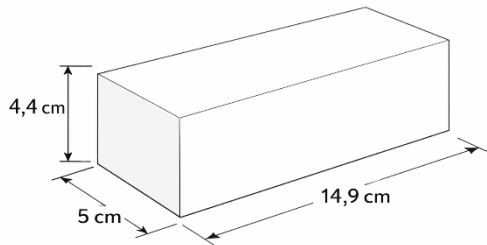

Artikelnummer	Part no.	808365
Typ	Type	IGST-ASD
Versorgungseingang	Power supply input	220..240 Vac; 50 Hz
Funksignal	Radio signal	2,4..2,483 GHz; 8 dBm (Long Range)
Signalausgang	Signal output	DALI / 0-10 V, max. 7 mA; SELV
Anschlüsse	connectors	230 V input 1x GST15i2 female Relay output 1x GST15i2 male Dali output 1x GST18i3 male
Umgebungstemperatur (ta)	Ambient temperature (ta)	-20..+40 °C
Max. Bemessungstemperatur (tc)	Rated max. temperature (tc)	75 °C
Kurzschlusschutz	Short circuit protection	Ja / Yes
Schutzart	Degree of protection	IP20
Abmessungen	Dimensions	14,9x4,5x4,4

- Schnittstelle zum komfortablen Bedienen mit Smart-Geräten zur Regelung von LED-Netzteilen mit DALI- oder 0-10 V-Signaleingang
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Gateway wird nicht benötigt, Einrichtung aber möglich
- Sendet DALI-Broadcast (1 ch), an DALI-Adresse 0..3 (mehrkanalig) und 0-10 V am SEC OUT
- Konfigurieren der anderen Schnittstellen-Typen (DALI: TW, RGB, RGB+W, 1..4 Ch, 0-10 V) möglich vor Koppeln ins Netzwerk: Profil ändern
- Nutzung des geschalteten Netzausganges in Abhängigkeit mit dem gewählten Profil. Die Verwendung des geschalteten Netzausganges ist nur mit Relais zulässig!
- Bei 0-10 V: Vollständige Abschaltung über Relais

- Interface for convenient operation with smart devices for controlling LED power supplies with DALI or 0-10 V signal input
- Configurable with the CASAMBI app and usable in many ways
- You can setup a gateway, but it is not necessary
- Sends DALI broadcast (1 ch), to DALI address 0..3 (multi channel) and 0-10 V at SEC OUT
- Configuration of the other interface types (DALI: TW, RGB, RGB+W, 1..4 ch, 0-10 V) possible before pairing to the network: change profile
- Use of the switched mains output depending on the selected profile.
- The use of the switched mains output is only permitted with relays!
- With 0-10 V: full switch-off with relay!