


Sprachgateway für CASAMBI-Lichtsteuerung
Voice gateway for CASAMBI lighting control

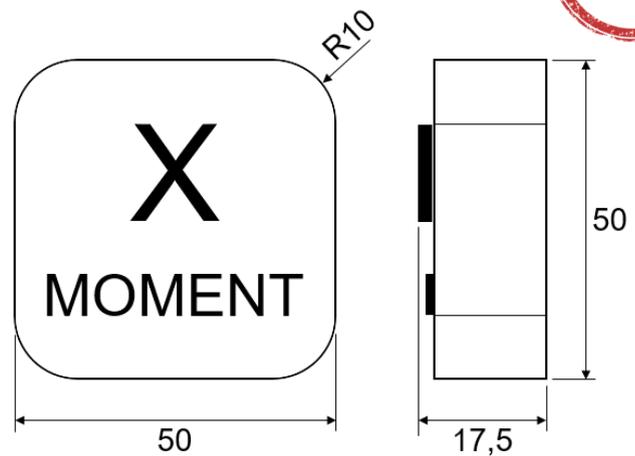

CASAMBI
READY

CE

Technische Daten <i>Technical data</i>	4 Befehle <i>4 commands</i>	16 Befehle <i>16 commands</i>	20 Befehle <i>20 commands</i>
Artikelnummer <i>Part no.</i>	808861	808866	808771
Typ <i>Type</i>	ILXM-4WBTB	ILXM-16WBTB	ILXM-20WBTB
Versorgungseingang <i>Power supply input</i>	5 Vdc; 0,5 A / Mikro USB-B		
Funksignal <i>Radio signal</i>	2,4..2,483 GHz; 4 dBm		
Funksignalreichweite <i>Radio signal range</i>	max. 40 m		
Schutzart <i>Degree of protection</i>	IP20		
Abmessungen <i>Dimensions</i>	50 x 50 x 17,5 mm		

- Sprachgateway (ALEXA-Ready) mit 4, 16 oder 20 Sprachbefehlen für CASAMBI-Netzwerke
- Ermöglicht die Steuerung Ihrer Geräte in CASAMBI-Netzwerke über selbst definierte Sprachbefehle
- Auf Smart-Geräten (Apple, Android) konfigurierbar, Einrichtungssoftware kostenlos im App-Store verfügbar
- Benötigt zusätzlich ein ALEXA-fähiges Gerät
- Kann auch die Gateway- und Uhrzeitfunktion für CASAMBI-Netzwerke übernehmen
- Im Lieferumfang enthalten: ein 50 cm USB-A auf Mikro USB-B-Kabel

- Voice gateway (ALEXA ready) with 4, 16 or 20 voice commands for CASAMBI networks
- Allows you to control your devices in CASAMBI networks using self-defined voice commands
- Configurable on smart devices (Apple, Android), setup software available free of charge in the App Store
- Also requires an ALEXA enabled device
- Can also take over the gateway and clock function for CASAMBI networks
- A 50 cm USB-A to micro USB-B cable is included in delivery

