


## Fernbedienung für CASAMBI-Netzwerke

Remote control for CASAMBI networks

Xpress

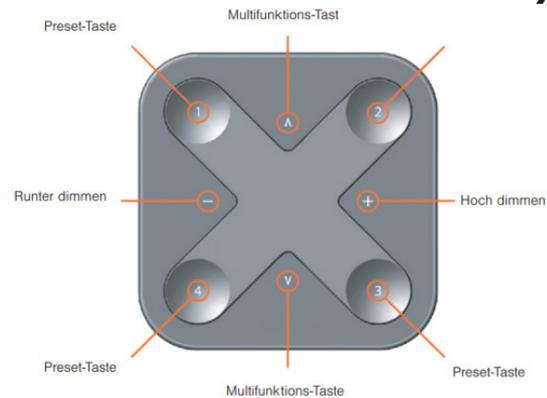

|                      |                  | schwarz<br>black       | weiß<br>white |
|----------------------|------------------|------------------------|---------------|
| Artikelnummer        | Part no.         | <b>800671</b>          | <b>800672</b> |
| Typ                  | Type             | RWBTB                  | RWBTW         |
| Funksignal           | Radio signal     | 2,4..2,483 GHz; 4 dBm  |               |
| Reichweite           | Range            | bis zu 60 m up to 60 m |               |
| Batterie             | Battery          | CR 2430 Lithium-ion    |               |
| Batterie Lebensdauer | Battery lifetime | 2 - 5 Jahre years      |               |
| Abmessungen          | Dimensions       | 90 x 90 x 12 mm        |               |

- Fernbedienung zur Steuerung von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- 4 Tasten (heller / dunkler, warm- / kaltweiß)
- 4 frei programmierbare Tasten (Szenen, Farbe,...)
- Die Lebensdauer der Batterie hängt vom Gebrauch ab
- Die Fernbedienung selbst ist magnetisch. Im Lieferumfang enthalten ist eine Grundplatte zur freien Montage, mit Metallplatten zur magnetischen Aufnahme.

- Remote control for controlling devices inside CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- 4 buttons (brighter / darker, warm / cool white)
- 4 free programmable buttons (scenes, colour,...)
- The battery lifetime depends on the usage
- The remote control itself is magnetic. The delivery includes a base plate for free assembly, with metal plates for magnetic mounting.