
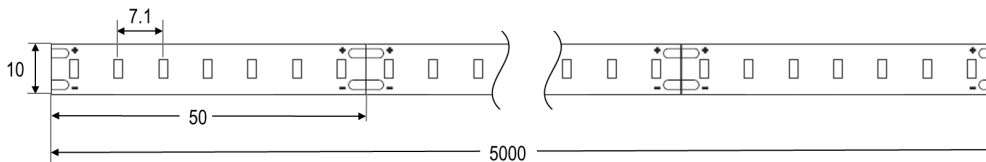


LED-Band 14,8 W/m mit 3014-LEDs

LED strip 14,8 W/m with 3014-LEDs



CE

Technische Daten <i>Technical data</i>	kaltweiß <i>cool white</i>	neutralweiß <i>neutral white</i>	warmweiß <i>warm white</i>	extrawarm <i>extra warm</i>
Artikelnummer <i>Part no.</i>	038704	038689	038619	038705
Typ <i>Type</i>	OS24-15-965	OS24-15-940	OS24-15-930	OS24-15-927
Leistung max. <i>Power max.</i>	14,8 W/m			
Lichtstrom typ. <i>Luminous flux typ.</i>	1600 lm/m	1500 lm/m	1420 lm/m	1380 lm/m
Farbtemperatur <i>Colour temperature</i>	~6200 K	~4000 K	~3000 K	~2700 K
Streubreite Farbtemp. <i>Variance of colour temperature</i>	MacAdam Step 3			
Farbwiedergabeindex <i>Colour rendering index</i>	> 90			
Ausstrahlwinkel <i>Viewing angle</i>	120 °			
Max. Bemessungstemperatur (ts) <i>Rated max. temp. (ts)</i>	60 °C			
Abmessungen <i>Dimensions</i>	5000 x 10 x 1 mm			
Anzahl LEDs <i>Number of LEDs</i>	140 /m			
Nenn-Eingangsspannung <i>Nominal input voltage</i>	24 Vdc			
Länge einer Einheit <i>Length of a unit</i>	50 mm			
Max. Länge nach Einspeisung <i>Max. length after feed-in</i>	3 m			

- 5 m flexibles LED-Band mit SMD-LEDs
- Selbstklebend
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 20 mm; ohne Druck ankleben
- Made in Italy

- 5m flexible LED strip with SMD-LEDs
- Self-adhesive
- Divisible between units, with solder pads
- Must be installed on a heat conductive surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 20 mm; attach without pressure
- Made in Italy

