
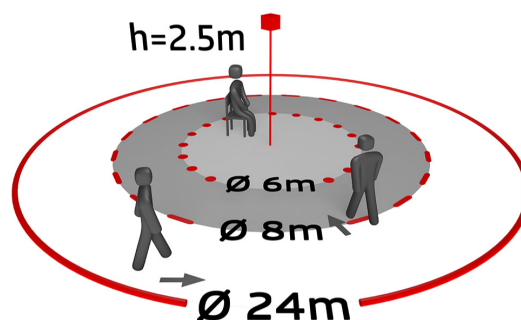
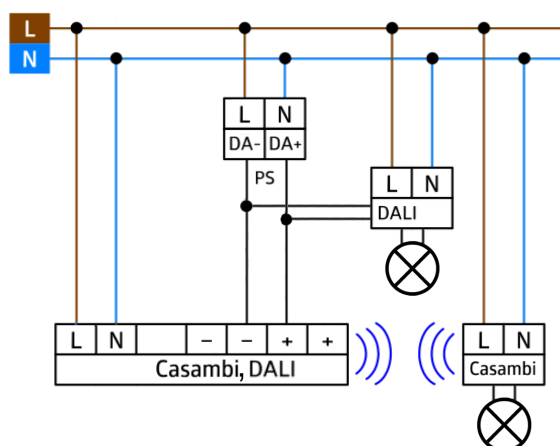


Bewegungs- und Tageslichtsensor mit CASAMBI-Lichtsteuerung

Motion and daylight sensor with CASAMBI lighting control

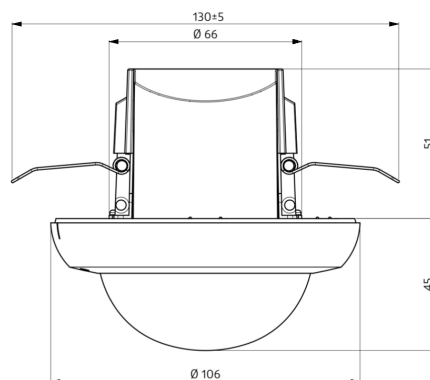

CASAMBI
READY

ohne DALI
without DALI

mit DALI -2
with DALI-2

Artikelnummer	Part no.	808180	808181
Typ	Type	SEMLBT230W	SEMLDABT230W
Versorgungsspannung	Supply voltage	230 Vac 50 Hz	
Funksignal	Radio signal	2,4..2,483 GHz; 4 dBm	
Signalausgang	Signal output	DALI-2 80 mA garantiert, 125 mA max	
Umgebungstemperatur (ta)	Ambient temperature (ta)	-5..45 ° C	
Abmessungen	Dimensions	106 x 95 mm	

- Bewegungs- und Tageslichtsensor für Netzspannung zum Steuern von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Montagehöhe 2..10 m; Erfassungsbereich horizontal 360° max. Ø 24 m quer, max. Ø 8 m frontal, max. Ø 6.4 m sitzende Tätigkeit
- Erfassungsbereich kann durch Blenden eingeschränkt werden
- Nachlaufzeit: 1 s .. 60 min, Helligkeitssollwert: 1.4000 lux

- Motion and daylight sensor for mains voltage to control devices in CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- Mounting height 2..10 m; detection range horizontal 360° max. Ø 24 m across, max. Ø 8 m towards, max. Ø 6.4 m seated activities
- Detection range can be limited by blinds
- Follow-up time: 1 s .. 60 min, brightness setpoint: 1.4000 lux