


LED-Band 4,8 W/m mit 2216-LEDs, mit IP-Schutz

LED strip 4,8 W/m with 2216-LEDs, with IP protection

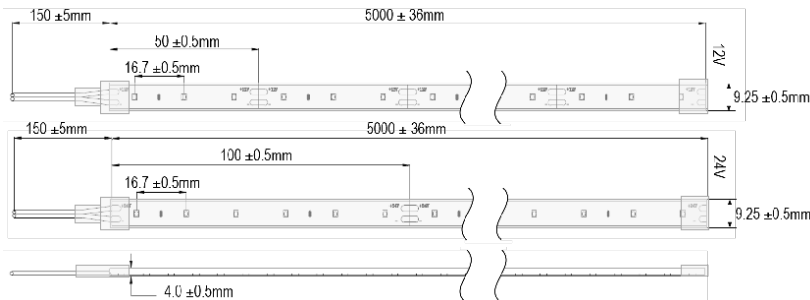

CE IP65

		kaltweiß cool white	neutralweiß neutral white	warmweiß warm white	extrawarm extra warm
Artikelnummer 12 Vdc	Part no. 12 Vdc	808270	808271	808272	808273
Typ 12 Vdc	Typ 12 Vdc	OSIS12-5-965	OSIS12-5-940	OSIS12-5-930	OSIS12-5-927
Artikelnummer 24 Vdc	Part no. 24 Vdc	808275	808276	808277	808278
Typ 24 Vdc	Typ 24 Vdc	OSIS24-5-965	OSIS24-5-940	OSIS24-5-930	OSIS24-5-927
Leistung max.	Power max.	4,8 W/m			
Lichtstrom typ.	Luminous flux typ.	368 lm/m	389 lm/m	360 lm/m	358 lm/m
Farbtemperatur	Colour temperature	6200 K	4000 K	2900 K	2700 K
Farbwiedergabeindex	Colour rendering index	90	92	91	91
Ausstrahlwinkel	Viewing angle	110 °			
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	60 °C			
Schutzart	Degree of protection	IP65			
Abmessungen	Dimensions	5000 x 9,25 x 4 mm			
Anzahl LEDs	Number of LEDs	60 /m			
Nenn-Eingangsspannung	Nominal input voltage	12 Vdc / 24 Vdc			
Länge einer Einheit	Length of a unit	50 mm / 100 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	4 m / 8 m			

- 5 m flexibles LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads, Montage und Abdichtset separat erhältlich, Art.-Nr. 808397
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible LED strip with SMD-LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads, mounting and sealing kit separately available, part no. 808397
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable