
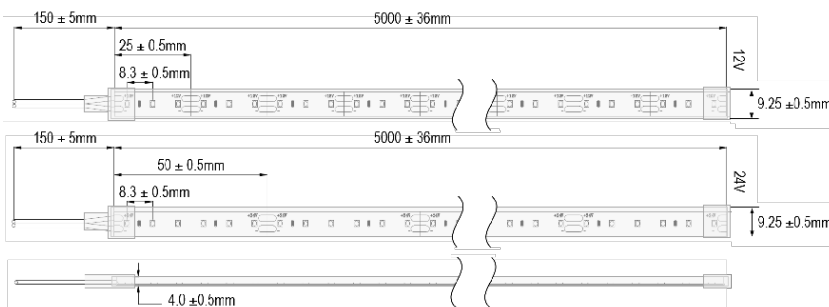


LED-Band 9,6 W/m mit 2216-LEDs IP65

LED strip 9,6 W/m with 2216-LEDs IP65

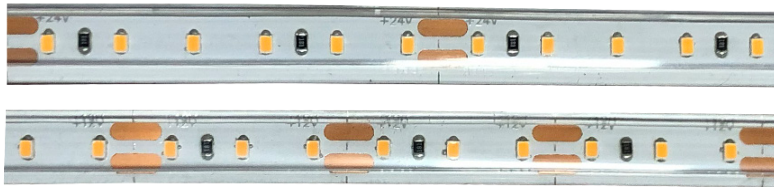

IP65 **CE**

		kaltweiß cool white	neutralweiß neutral white	warmweiß warm white	extrawarm extra warm
Artikelnummer 12 Vdc	Part no. 12 Vdc	808300	808301	808302	808303
Typ 12 Vdc	Type 12 Vdc	OSIS12-10-965	OSIS12-10-940	OSIS12-10-930	OSIS12-10-927
Artikelnummer 24 Vdc	Part no. 24 Vdc	808305	808306	808307	808308
Typ 24 Vdc	Type 24 Vdc	OSIS24-10-965	OSIS24-10-940	OSIS24-10-930	OSIS24-10-927
Leistung max.	Power max.	9,6 W/m			
Lichtstrom typ.	Luminous flux typ.	734 lm/m	778 lm/m	723 lm/m	717 lm/m
Farbtemperatur	Colour temperature	6200 K	4000 K	2900 K	2700 K
Farbwiedergabeindex	Colour rendering index	90	92	91	91
Ausstrahlwinkel	Viewing angle	110 °			
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	60 °C			
Schutzart	Degree of protection	IP65			
Abmessungen	Dimensions	5000 x 9,25 x 4 mm			
Anzahl LEDs	Number of LEDs	120 / m			
Nenn-Eingangsspannung	Nominal input voltage	12 Vdc / 24 Vdc			
Länge einer Einheit	Length of a unit	25 mm / 50 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	3 m / 6 m			

- 5 m flexibles IP65 geschütztes LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads, Montage und Abdichtset separat erhältlich, Art.-Nr. 808397
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible IP65 secured LED strip with SMD-LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads, mounting and sealing kit separately available, part no. 808397
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable