




Fernbedingung mit Glasoberfläche für CASAMBI-Netzwerke

Remote control with glass surface for CASAMBI networks

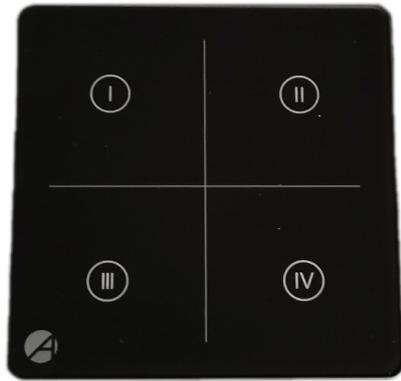

		schwarz black	weiß white	grau grey
Artikelnummer	Part no.	808856	808857	808858
Typ	Type	RCG4BTBAB	RCG4BTBAW	RCG4BTBAGR
Funksignal	Radio signal	2,4..2,483 GHz; 4 dBm		
Reichweite	Range	bis zu 30 m up to 30 m		
Umgebungstemperatur (ta)	Ambient temperature (ta)	+10..+30 °C		
Batterie	Battery	3,3 Vdc CR 2430 Lithium-Ion		
Stromaufnahme	Current draw	max. 5 µA		
Abmessungen	Dimensions	89 x 89 x 9,8 mm		

- Edle Fernbedienung mit Glasoberfläche und Aluminiumgehäuse zur Steuerung von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- 4 kapazitive Sensorfelder zur freien Programmierung (Steuerung von Leuchten, Szenen, Farben...)
- Lebensdauer der Batterie ca. 1 Jahr, abhängig vom Gebrauch
- Schalter sollte vor direkter Sonneneinstrahlung geschützt werden. Nicht geeignet für Räume mit sehr hoher Luftfeuchtigkeit oder Temperatur, da dies zu Fehlauflösungen führen kann.

- Noble remote control with glass surface and aluminum housing for controlling devices inside CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- 4 capacitive sensor fields for free programming (control of lights, scenes, colours ...)
- Battery lifetime ca. 1 year, depends on the usage
- Switch should be protected from direct sunlight. Not suitable for rooms with very high humidity or temperature, as this can lead to false triggering.