


LED-Band 14,4 W/m mit R+G+B 2110-LEDs

LED strip 14,4 W/m with with R+G+B 2110-LEDs

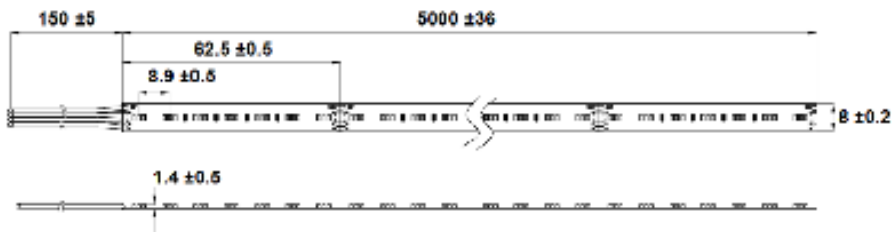

Gesamt
Total

808380

Artikelnummer 12 Vdc	Part no. 12 Vdc	
Typ 12 Vdc	Type 12 Vdc	OS24-14-R+G+B
Leistung max.	Power max.	14,4 W/m
Lichtstrom typ.	Luminous flux typ.	530 lm/m
Ausstrahlwinkel	Viewing angle	120 °
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	60 °C
Abmessungen	Dimensions	5000 x 8 x 1,2 mm
Anzahl LEDs	Number of LEDs	3 x 112 /m
Nenn-Eingangsspannung	Nominal input voltage	24 Vdc
Länge einer Einheit	Length of a unit	62,5 mm
Max. Länge nach Einspeisung	Max. length after feed-in	5 m

- 5 m flexibles LED-Band mit einzelnen LEDs in rot, grün und blau
- Selbstklebend
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Kabel
- Für RGB-Anwendungen mit wenig Platz

- 5 m flexible LED strip with single LEDs in red, green and blue
- Self-adhesive
- Divisible between units, with solder pads
- Must be installed on a heat conductive surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm cable
- For RGB applications with little space