


LED-Band 15 W/m mit 5630-LEDs neigbar mit Stromregler  
 LED strip 15 W/m with 5630-LEDs tilttable with current regulator

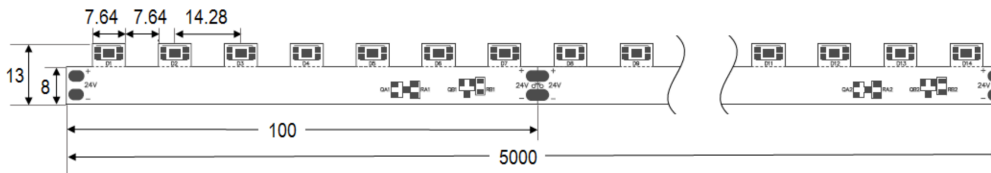

Technische Daten <i>Technical data</i>	kaltweiß <i>cool white</i>	neutralweiß <i>neutral white</i>	warmweiß <i>warm white</i>	extrawarm <i>extra warm</i>
Artikelnummer <i>Part no.</i>	800875	800876	800877	800878
Typ <i>Type</i>	OSML24-15-965	OSML24-15-945	OSML24-15-930	OSML24-15-927
Leistung max. <i>Power max.</i>	15 W/m			
Lichtstrom typ. <i>Luminous flux typ.</i>	1680 lm/m	1560 lm/m	1300 lm/m	1280 lm/m
Farbtemperatur <i>Colour temperature</i>	~6500 K	~4500 K	~3000 K	~2700 K
Streubreite Farbtemp. <i>Variance of colour temperature</i>	±500 K	±300 K	±200 K	±200 K
Farbwiedergabeindex <i>Colour rendering index</i>	> 90			
Ausstrahlwinkel <i>Viewing angle</i>	120 °			
Max. Bemessungstemperatur (ts) <i>Rated max. temp. (ts)</i>	60 °C			
Abmessungen <i>Dimensions</i>	5000 x 13 x 1,5 mm			
Anzahl LEDs <i>Number of LEDs</i>	70 /m			
Nenn-Eingangsspannung <i>Nominal input voltage</i>	24 Vdc			
Länge einer Einheit <i>Length of a unit</i>	100 mm			
Max. Länge nach Einspeisung <i>Max. length after feed-in</i>	20 m			

- 5 m flexibles LED-Band mit SMD-LEDs
- LEDs neigbar zur freien Lichtgestaltung
- Mit Stromregler für lange Einspeislänge
- Selbstklebend
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible LED strip with SMD-LEDs
- LEDs tilttable for free light design
- With current regulator, for long feed-in length
- Self-adhesive
- Divisible between units, with solder pads
- Must be installed on a heat conductive surface for cooling purposes
- If installed onto a surface that conducts electricity please ensure, that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable

